NEW in 2006: DMT

We are proud to introduce to you the new audio-visual products brand DMT. DMT stands for Dutch Media Tools and incorporates equipment for audio-visual presentations. DMT products are designed in the Netherlands and manufactured in the far east to keep production costs within a reasonable margin. Because of this we can deliver very professional products with an extremely competitive price tag, thus opening the world of moving images and presentations for a wider audience.
On the following pages you find some very nice "appetizers" that give you a clue of what to expect in the near future.

As starters we introduce a quartet of semi- and professional beamers: each with its own characteristics, field of use and target-audience. We start with the "entry-level" D418V and end with our flagship, the DMT D630MX, which features a contrast-ratio of 1500:1, 3000 lumen (max) and extensive compatibility with playback devices and standards. Of course we also supply the necessary presentation screens!
If your audience is "somewhat" bigger and you need to visualize a presentation or live-event on a bigger screen we have the DMT Pixelboards for you. These modular boards can be combined to huge, and we mean really huge, screens that can display any given presentation: motion pictures, graphics, text...you name it.
To make sure your show doesn't get messed up by inferior components we also can supply all the necessary connectors and cables, thus providing a reliable connection between your AV-gear!

Wir freuen uns, Ihnen in diesem Jahr eine neue Eigenmarke für audio-visuelle Produkte präsentieren zu können: DMT. DMT steht für "Dutch Media Tools" und umfaßt Equipment für audio-visuelle Präsentationen. DMT-Produkte wurden in den Niederlanden entwickelt und im Fernen Osten produziert, um die Produktionskosten innerhalb einer vernünftigen Marge zu halten. Deshalb sind wir in der Lage, sehr professionelle Produkte zu einem extrem konkurrenzfähigen Preis zu liefern, um die Welt bewegter Bilder und Präsentationen einem breiteren Publikum zugänglich zu machen. Auf den folgenden Seiten finden Sie einen kleinen Vorgeschmack dessen, was Sie in der nahen Zukunft erwartet.

Als Vorspeise servieren wir ein Quartett von Semi- und Professional Beamern: jedes Gerät mit eigenem Charakter, Einsatzmöglichkeit und Zielgruppe. Wir fangen mit dem "Eingangslevel" D418V an und hören mit unserem Flaggschiff auf, dem DMT D630MX, der über ein Kontrastverhältnis von 1500:1, 3000 Lumen (max.) sowie eine erweiterte Kompatibilität mit Playback-Geräten und Standard-Abspielformaten verfügt. Natürlich liefern wir dazu auch die notwendigen Präsentations-Plasmabildschirme!

Wenn Ihr Publikum ein bißchen größer ist und Sie eine Präsentation oder ein Live-Event auf einem größeren Plasmaschirm visualisieren möchten, sind die neuen DMT-Pixelboards das Richtige für Sie. Diese Board-Module können zu großen - und damit meinen wir wirklich großen - Bildschirmen verbunden werden. Bildschirme, die jede Präsentation zeigen können: bewegte Bilder, Grafiken, Texte...was Sie wollen.

Um zu gewährleisten, dass Ihre Show nicht an qualitativ schlechteren Komponenten scheitert, liefern wir auch die nötigen Anschlüsse und Kabel - so wird eine stabile Verbindung zwischen Ihrem AV-Zubehör garantiert!

DMT
DUTCH MEDIA TOOLS

DMT D418V

Digital Multimedia Projector, SVGA 1800

ORDERCODE: 100101

D418 Series is a projector with an amazing image quality because it's powered by superior technology which enhances brightness, contrasts, tint, colour and clarity. There are several tools to help the user to reduce the time of preparation for efficient presentation purposes. Case, Cable and Remote Included!

- Independent 7-colour adjustment
- Light by OSRAM, quality lamp
- Bi-Modes selection: Eco & Standard
- 720p./1080i (HDTV Compatible)
- Digital Visual Interface (DVI)
- Picture-in-Picture
- Auto Source Detection
- Multiple OSD Languages
- Multi-Projection Methods
- Customized Flash Logo
- Zero radiation
- Smart Cooling System
- Carrying Case for travelling

Including accessories:
Projector with Lens cover
Remote control with batteries
Local Power Card
Soft Carrying Case
DVI to RGB Cable
S-Video Cable
Stereo Mini Jack Cable (for PC)
USB Cable
Quick Start Guide (hard copy)
User manual (CD)

Carl Zeiss Lens!

Hervorragende Bildqualität:
- Ausgereifte Technik bezüglich Helligkeit, Kontrast, Farbe, Schärfe
- Hilfsfunktionen zur effizienteren Vorbereitung von Präsentationen
- Inklusiv Koffer, Kabel u. Fernsteuerung!

DMT Spare lamp

for D418V

ORDERCODE 100151

Technical Information				
Display Technology:	0.55" DMD, DDP 2000		Remote control features:	Power On/Off, Menu, OSD navigation, Freeze on-screen picture, Keystone adjustment, Auto Key to optimize image performance, Mute to control built-in speaker, Volume control, Detect input-source
Resolution:	SVGA 800x600 (native), 1024X768 (compressed)			
Pojection Distance:	1,5-7m.			
Screen Size(diagonal):	0,93x5,16m.			
Contrast Ratio:	2000:1			
Brightness:	1800 Lumen		Standard Accessories:	Power cord, Remote control, carrying case, lens cap, DVI-RGB cable S-Video, QSG, Manual in disk, Composite video cable, RCA audio cable
Throw Ratio(D/W):	1.16:1			
Lamp:	200W(VIP-Type)			
Aspect Ratio:	4:3 & 16:9		Optional Accessories:	Lamp replacement module, component video cable
Lens:	Carl Zeiss with Manual zoom(1:1,16) and Focus F2,6		Special features:	Eco Mode, Customized Flash Logo
Data Compatibility:	IBM PC or Compatible (VGA, SVGA, XGA) and Macintosh		Safety Certification:	FCC-B, UL, C-UL, CE/TUV.CB, CCC
Video Compatibility:	NTSC/NTSC 4,43, PAL, SECAM Composite & S-Video HDTV: 480i, 480p, 720p, 1080i		Lamp:	100151
Digital Keystone Correction:	+/- 15° (Vertical)			
Input/Output:	RGB Input	DVIx1		
	S-Video in	Mini DIN 4-pin x1		
	Composite video	RCA jack x1		
	Audio in	Mini Jack x1		
	Component Video	Through DVI-Input		
	Rs232 Input	PS/2 Mini Din x1		
	USB Input	Type B receptacle x1		
Security:	Kensington® MicroSaver Security System			
Weight:	2.0Kg			
Dimensions(LxWxH):	280mm x 205mm x 97mm			
Noise:	34dB			

DMT D315M
Digital Multimedia Projector, XGA 1500

ORDERCODE: 100100

NEW PRODUCT

PICTURE BY DLP™ A TEXAS INSTRUMENTS TECHNOLOGY

DLP DDR Technology
- Ultra Light Weight (1,5Kg.)
- Native XGA (1024x768) Resolution
- Bright 1500 Lumen
- Superior Contrast Ratio at 1200:1
- Digital Visual Interface(DVI)
- Digital Keystone Correction

Including accessories:
Projector with Lens cover
Remote control with batteries
Local Power Card
Soft Carrying Case
DVI to RGB Cable
S-Video Cable
Composite Video Cable
Stereo Mini Jack Cable (for PC)
USB Cable
Quick Start Guide (hard copy)
User manual (CD)

DLP DDR Technologie
- Sehr geringes Gewicht(1,5Kg)
- Native-XGA-Auflösung (1024x768)
- Helle 1500 Lumen
- Sehr gutes Kontrast-Verhältnis: 1200:1
- Digital Visual Interface(DVI)
- Digital Keystone Correction

DMT DUTCH MEDIA TOOLS

DMT Spare lamp
for DM315M

ORDERCODE 100150

Technical Information

Display Technology:	0.7" DMD, DDR DLP
Resolution:	XGA 1024X768 (native), SXGA 1280x1024 (compressed)
Pojection Distance:	1,5-10m.
Screen Size(diagonal):	0,98x7,83m.
Contrast Ratio:	1200:1"
Brightness:	1500 Lumen
Throw Ratio(D/W):	1.5-1,8
Lamp:	150W
Aspect Ratio:	4:3 & 16:9
Picture-in-Picture:	Yes (video-over-Data)
Lens:	Manual zoom(1:1,2) and Focus F2,4
Data Compatibility:	IBM PC or Compatible (VGA, SVGA, XGA) and Macintosh
Video Compatibility:	NTSC/NTSC 4,43, PAL, SECAM Composite & S-Video HDTV: 480i, 480p, 720p, 1080i
Timing Range:	VGA H-Sync 15, 31~90KHz VGA V-Sync 43-85Hz
Digital Keystone Correction:	+/- 15° (Vertical)
Input/Output:	RGB Input DVIx1 S-Video in Mini DIN 4-pin x1 Composite video RCA jack x1 Audio in Mini Jack x1 USB Input Type B receptacle x1
Sound Output:	0,5W mono speaker
Power Consumption:	210W
Security:	Kensington® MicroSaver Security System
Weight:	1,5Kg
Dimensions(LxWxH):	240mm x 188mm x 64mm
Noise:	33dB
Remote control features:	Built-in Laser pointer and mouse function
OSD Language:	English,German, French, Spanish, Portuguese, Chinese
Safety Certification:	FCC-B, UL, C-UL, CE/TUV.CB, CCC
Lamp:	100150

DMT D625MX

Digital Multimedia Projector, XGA 2500

ORDERCODE: 100102

Christal Clear image quality driven by superb performance
- Extra high brightness for middle and large rooms
- Progressive scan delivers smoother video pictures
- Digital keystonecorrection avoids distorted projections
- Auto-detect input signals
- No-Delay projection when inter-switching between input signals
- Eco-mode projection provides energy saving, more noise reduction and longer lamp life
- Smart cooling system for energy saving
- Durable workhorse projector

Including accessories:
Projector with Lens cover
Remote control with batteries
Local Power Card
Soft carrying case
DVI to RGB Cable
S-Video Cable
USB Cable
Quick Start Guide (hard copy)
User manual (CD)

Kristallklare Bildqualität
- Extra Helligkeit für große Räume
- Weiche Videobild-Projektion
- Digital-Korrektur gegen Bildverzerrungen
- Automatisches Erkennen von Input-Signalen
- Keine Verzögerung der Projektion beim Schalten zwischen Input-Signalen
- Eco-Modus für Energiespar-Effekt, Geräuscharmut und Haltbarkeit
- Kühlsystem spart Energie
- Stabiles Projektor-Gehäuse

NEW PRODUCT

PICTURE BY DLP™ A TEXAS INSTRUMENTS TECHNOLOGY

DMT DUTCH MEDIA TOOLS

DMT Spare lamp

for D625MX

ORDERCODE 100152

Technical Information

Technology:	0.7" 12 degree DDR DLP with DDP 2000	Input:	DVI-I in, RGB in, Video RCA in, S-Video in, Component in, Audio (mini jack in), Audio (RCA*2 in), RS-232 in
Resolution::	XGA 1024x768 (Native)		
Contrast Ratio:	2000:1		
Brightness:	2500 Lumen	Output Terminal:	RGB out, USB out
Uniformity:	80%	Built-in Speaker:	2W mono speaker
Zoom Ratio:	1.20:1	Security Lock:	Kensington Lock
Throw Ratio:	1.64 - 1.97	Special feature:	Data and Audio loop-though, ECO mode
Aspect Ratio:	4:3 & 16:9		
Keystone Correction:	Vertical +/- 15°		
H-Sync:	15/31 ~ 90KHz		
V-Sync:	50-85KHz		
Data Compatibility:	IBM PC or Compatible (VGA, SVGA, XGA, SXGA)		
Video Compatibility:	SDTV, EDTV, HDTV, NTSC/PAL		
Dimensions (LxWxH):	328mm x 238mm x 88mm		
Weight:	2.9 Kg		
ODS Language:	English, French, German, Spanish, Italian, Swedish, Japanese, Chinese, Korean		

DMT D630MX
Digital Multimedia Projector, XGA 3000

ORDERCODE: **100103**

When connected to a local Area Network (LAN) with the RJ-45 connector, the projector can be controlled remotely through a Web browser by any of the PC clients on the same LAN network. The projector can also be set to “email operating status information” for easy monitoring.

- Crystal clear image quality driven by superb performance
- Extra high brightness for middle and large rooms
- Progressive scan delivers smoother transitions
- Digital keystone correction relieves distorted projections
- Eco-mode projection provides energy saving, more noise reduction and longer lamp life
- Advanced remote networking technology for easy monitoring and operation
- Advanced functions enables amazing presentations
- Durable workhorse projector

Accessories included:
Projector with Lens cover
Remote control with batteries
Local Power Card
Soft carrying case
DVI to RGB Cable
S-Video Cable
Stereo Mini Jack Cable (for PC)
USB Cable
Quick Start Guide (hard copy)
User manual (CD)

DMT Spare lamp
for D630MX

ORDERCODE **100153**

Mit RJ-45-Anschluss an ein lokales Netzwerk (LAN) kann der Projektor über Web-Browser von jedem PC-Kunden auf dem gleichen LAN-Netzwerk ferngesteuert werden.

- Einfache visuelle Kontrolle durch “email operating status information”
- Kristallklare Bildqualität
- Extra Helligkeit für große Räume
- Digital-Korrektur gegen Bildverzerrungen
- Eco-Modus sorgt für Energiespar-Effekt, Geräuschreduktion und Haltbarkeit
- Stabiler Projektor

Technical Information

Display Technology:	0.7", 12 degree DDR DLP		(VGA, SVGA, XGA, SXGA)
Resolution:	XGA 1024x768 (Native), Support SXGA 1280x1024	Video Compatibility:	SDTV, EDTV, HDTV, NTSC\PAL
Color Reproduction:	24 bit, 16.7million True Color	Input Terminal:	DVI in, Video RCA in, S-Video in, Audio in, RS3232 in, LAN RJ-45 in
Contrast Ratio:	1500:1	Output Terminal:	RGB in, USB out, Audio out
Brightness:	3000 Lumens (Maximun)		
Focal Length(Wide-Tele):	20.2-24.2 mm	Fan noise:	<35dB
Uniformity:	80%	Safety:	UL/CUL, CB, CE, CCC, FCC Class B
Colour:	24 bit, 16,7million true colour	Speaker:	3W mono speaker
Lens:	Zoom lens, manual zoom, manual focus	Security Lock:	Kensington® MicroSaver Security System
Projection distance:	1,5-10meter	OSD Language:	English,German, French, Italian, Portuguese, Japanese, Chinese Simplified, Chinese Traditional
Projection size(diagonal):	35"x284"		
Throw Ratio (D/W):	1.73 - 2.10		
Aspect Ratio:	4:3 & 16:9	Weight:	3.1 Kg
Keystone Correction:	+/- 15°	Dimension (LxWxH):	285 x 220 x 86mm
H&V Sync.:	15, 31-60KHz 50-85Hz	Lamp:	100153
Data Compatibility:	IBM PC or Compatible		

DMT Projection Screen 4:3 Manual

The DMT manual projectionscreens are operated using a crank or spring mechanism. The manual screens are ideal for applications in rooms where an electrical connection is either not possible or undesirable. Manual screens are extremely suitable for applications in classrooms, training rooms, meeting rooms as well as at home.

Available models:

ORDERCODE **100300** 4:3 (2,0x1,5m) manual

ORDERCODE **100301** 4:3 (2,4x1,8m) manual

Technical Information			
100300:		Screen Dimension:	2,0 x 1,5m
Size:	4:3	Control:	Manual
Diagonal:	100" / 254 cm		
100301:		Screen Dimension:	2,4 x 1,8m
Size:	4:3	Control:	Manual
Diagonal:	120" / 304 cm		

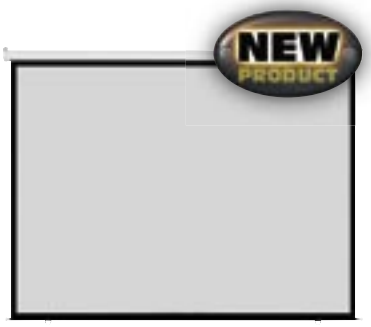

Diese DMT-Projektionswand ist ideal für eine Präsentation in Räumen, in denen ein elektrischer Anschluss nicht möglich ist bzw. nicht gewünscht ist. Die Manual-Screens sind sehr gut für Klassenräume, Seminarräume, Konferenzräume sowie für Zuhause geeignet.

DMT Projection Screen 4:3 electric

The new electrical projection screens from DMT equipped with an excellent quality projection screen and a roll mechanism that guarantees a perfectly flat-hanging screen fabric under any circumstances. All electric screens are equipped with a strong and silent pipe-motor in order to guarantee maximum performance.

Available models:

ORDERCODE **100330** 4:3 (2,4x1,8m) electric

ORDERCODE **100331** 4:3 (3,0x2,2m) electric

ORDERCODE **100332** 4:3 (3,6x2,7m) electric

Technical Information			
100330:		Screen Dimension:	2,4 x 1,8m
Size:	4:3	Control:	Electric
Diagonal:	120" / 304 cm		
100331:		Screen Dimensions:	3,0 x 2,2m
Size:	4:3	Control:	Electric
Diagonal:	150" / 381 cm		
100332:		Screen Dimension:	3,6 x 2,7m
Size:	4:3	Control:	Electric
Diagonal:	180" / 457 cm		

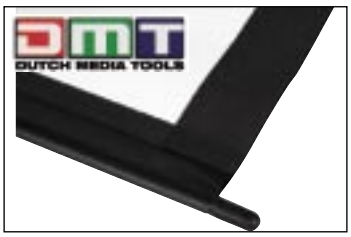

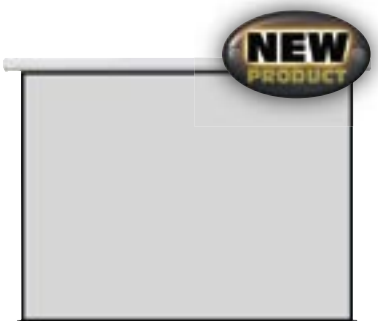

Diese neue elektrische Projektionswand von DMT ist ein hochwertiger Flachbildschirm mit einem Rollmechanismus, der eine perfekte Bildqualität garantiert. Alle elektrischen Schirme sind mit einem stabilen und leisen Pipe-Motor ausgestattet, um maximale Leistung zu gewähren.

DMT Projection Screen 16:9 manual

Available models:

ORDERCODE **100310** 16:9 (2,4x1,35m) manual

ORDERCODE **100320** 16:9 (2,4x1,8m) manual

DMT DUTCH MEDIA TOOLS

Technical Information			
Size:	16:9	Screen Dimension:	2,4 x 1,35m
Diagonal:	108" / 275 cm	Control:	Manual
Size:	16;9	Screen Dimension:	3,0 x 1,68m
Diagonal:	135" / 342 cm	Control:	Manual

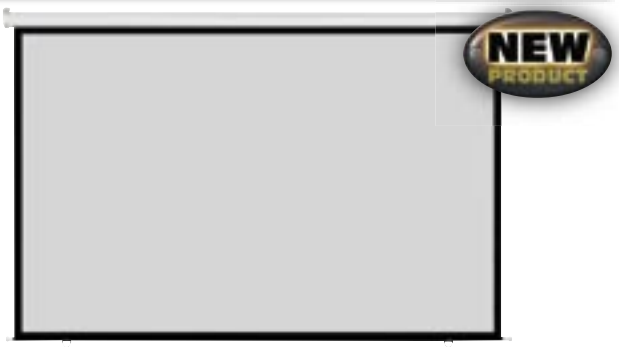

DMT Projection Screen 16:9 electric

Available models:

ORDERCODE **100340** 16:9 (2,4x1,35m) electric

ORDERCODE **100341** 16:9 (3,0x1,68m) electric

ORDERCODE **100342** 16:9 (3,6x2m) electric

DMT DUTCH MEDIA TOOLS

Technical Information			
Size:	16:9	Screen Dimension:	108" / 275 cm
Diagonal:	DMT	Control:	Electric
Size:	16:9	Screen Dimension:	135" / 342 cm
Diagonal:	DMT	Control:	Electric
Size:	16:9	Screen Dimension:	162" / 412 cm
Diagonal:	DMT	Control:	Electric

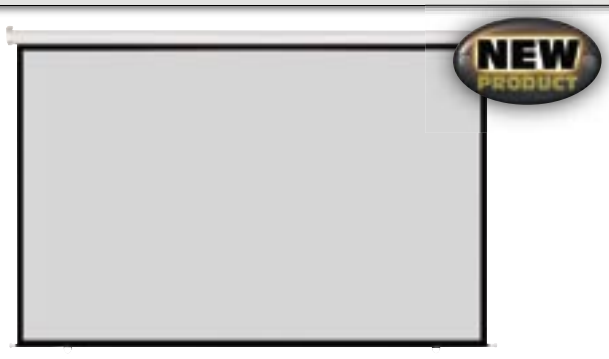

DMT LED Pixelboard 330/64

ORDERCODE: 101100

The new DMT LED Pixelboard is a compact but versatile Pixelboard with dimensions of 33x33cm. Each board contains 8x8 = 64 pixels. By clustering multiple LED Pixelboards together you can create a real medium-resolution video-wall.
Due to the compact size of the Pixelboard, the Pixelboard is suitable as well for decoration and other creative light-concepts.

The LED Pixelboard has a protection-degree of IP-44 and therefore also can be used for temporary outdoor use. The Pixelboard has a power-supply of 230V which can linked up together. The data is linked by a special multi-connector which can be linked up as well.
Each LED pixelboard comes including one powersupply cable, one datacable and two mountingbrackets.

Technical Information

Controlmode:	Via PC by dedicated interface
Power supply:	230V
Power consumption:	18W
Protection degree:	IP-44
Pixel Pitch:	40 mm
Pixel per board:	8x8 = 64 pixels
Size:	333x333x60mm

Das neue DMT LED-Pixelboard ist ein kompaktes und vielseitiges Pixelboard mit den Abmessungen 33x33cm. Jedes Board enthält 8x8 = 64 Pixel. Indem man mehrere LED-Pixelboards zusammen montiert, kann man eine echte "Video-Wand" mittlerer Auflösung entwickeln. Aufgrund der kompakten Größe des Pixelboards eignet es sich sowohl zur Dekoration als auch für andere kreative Lichtkonzepte. Das LED-Pixelboard verfügt über einen Schutzgrad von IP-44, deshalb kann das Gerät zeitweise draußen eingesetzt werden. Das Pixelboard hat einen Power-supply von 230V. Die Daten werden mit einem speziellen Multi-Anschluss verbunden, der ebenfalls gelinked werden kann. Jedes LED-Pixelboard wird inklusive Netzkabel, einem Datenkabel und zwei Montagebügeln geliefert.

DMT LED Pixelboard 330/64 Interface

ORDERCODE: 101101

The LED Pixelboard 330/64 Interface contains a interface and all the necessary software to run your LED Pixelboard. The interface package contains a box with the interface inside, which contains the outputs to the screen.Furthermore it comes with a ATI Display card as well a interface card which have to be connected to your computer.The interface is connected by RJ45 to the computer and once the plug-and-play software is installed you can play any file (MPEG, MPA, AVI, VCD, SWF, DVD etc) on your screen.

Das LED Pixelboard 330/64 Paket enthält ein Interface und die notwendige Software, damit das LED-Pixelboard läuft. Das Interface wird zusammen mit einer ATI-Display-Card und einer Interface-Card geliefert, die an Ihren Computer angeschlossen werden müssen. Das Interface ist über RJ45 an den Computer angeschlossen, und wenn die Software installiert ist, können Sie jede Datei (MPEG, MPA, AVI, VCD, SWF, DVD etc) auf Ihrem Bildschirm abspielen.

DMT LED Pixelboard 1000/256

ORDERCODE: 101120

The LED Pixelboard 1000/256, is a system of LED pixel panels that create new possibilities for LED screens. Each panel is comprised of 16 x 16 LED clusters, with each LED cluster representing a single pixel in so that the LED Pixelboard 1000/256 acts as an extension of your PC monitor. Display video, animation images, flash files, text or any format that can be displayed on your PC. The unit is suitable for all kinds of applications that require large scale graphics such as stages, theatres, clubs and shopping malls. For smaller scale applications, the LED Pixelboard 1000/256 also provides excellent possibilities as a color wall or for displaying for bold images and more simple flash files. The dedicated software allows the user to create a program using a sequence of files, displaying them independently, one after the other or simultaneously. For quick live control of the LED Pixelboard 1000/256, simply click and drag the display area on the PC over the area that you wish to display.

Das LED-Pixelboard 1000/256 ist ein LED Pixel-Paneel System, das neue Perspektiven für LED-Bildschirme eröffnet. Jedes Paneel besteht aus 16 x 16 LED Clustern, wobei jeder LED-Cluster ein Pixel (Bildpunkt) darstellt, so dass das LED-Pixelboard 1000/256 als Erweiterung Ihres PC-Monitors fungiert. Auf diese Weise können Sie Videos, Bild-Animationen, Flash-Bilder, Texte oder jedes Format darstellen, das auf Ihrem PC gezeigt werden kann. Das Gerät ist für Einsätze geeignet, bei denen groß skalierte Grafiken benötigt werden, z. B. auf Bühnen, im Theater, in Clubs oder Einkaufspassagen. Für kleinere Präsentationen verfügt das LED Pixelboard 1000/256 auch über exzellente Möglichkeiten als Farbwand oder zur Projektion von groben Bildern oder einfacheren Flash-Dateien. Die geeignete Software ermöglicht dem Anwender die Gestaltung eines Programms mit einer Reihe von Dateien, die unabhängig voneinander gezeigt werden - eine nach der anderen oder gleichzeitig. Zur schnellen "live- control" des LED Pixelboard 1000/256 klicken und ziehen Sie den Display-Bereich auf dem PC über den Bereich, den Sie zeigen möchten.

Technical Information	
Controlmode:	Via PC by dedicated interface
Power supply:	230V
Power consumption:	30W
Protection degree:	IP-33
Pixel Pitch:	55 mm
Pixel per board:	16x16= 256 pixels
Size:	1000x1000x100cm
Weight:	35kg

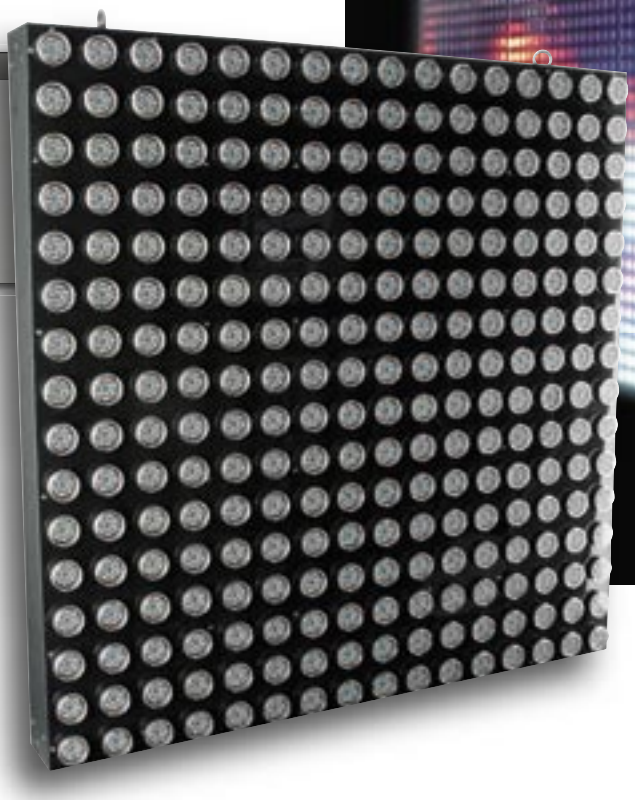

NEW PRODUCT

DMT Interface for LED Pixelboard 1000/256

ORDERCODE: 101121

NEW PRODUCT

The LED Pixelboard 1000/256 Interface contains a interface and all the necessary software to run your LED Pixelboard.
The interface package contains a box with the interface inside and which has to be put in your computer.
The interface is connected by RJ45 to the computer and once the plug-and-play software is installed you can play any file (MPEG, MPA, AVI, VCD, SWF, DVD etc) on your screen.

Das LED-Pixelboard 1000/256 Interface enthält eine Box mit dem Interface sowie die dazugehörige Software für Ihr LED Pixelboard. Das Interface ist über RJ45 an den Computer angeschlossen, und wenn die Software installiert ist, können Sie jede Datei (MPEG, MPA, AVI, VCD, SWF, DVD etc) auf Ihrem Bildschirm abspielen.

DMT LCD-101

NEW PRODUCT

LENGTH:
Adj. Wallbracket for LCD Long

ORDERCODE 100200



DMT LCD-103

NEW PRODUCT

LENGTH:
Adj. Wallbracket for LCD Short

ORDERCODE 100201



DMT LCD-201

NEW PRODUCT

LENGTH:
Adj. Wallbracket for LCD

ORDERCODE 100202



DMT LCD-401

NEW PRODUCT

LENGTH:
Luxury adj. Wall Bracket for LCD

ORDERCODE 100203



DMT LCD-403

NEW PRODUCT

LENGTH:
Luxury adj. Wall Bracket for LCD

ORDERCODE 100204



DMT PRB-1

NEW PRODUCT

LENGTH:
Ceiling Bracket for LCD Projector Short

ORDERCODE 100230

Diameter 130-320mm
incl. pipe length
150mm & 80mm
max. 10 Kg

DMT LCD-404

NEW PRODUCT

LENGTH:
Luxury adj. Ceiling Bracket for LCD

ORDERCODE 100205

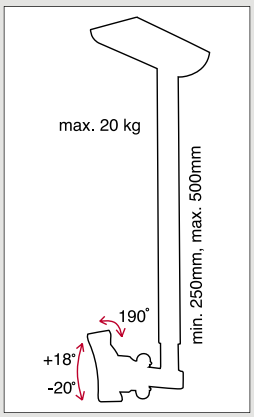

DMT PRB-2

NEW PRODUCT

LENGTH:
Ceiling Bracket for LCD Projector Long

ORDERCODE 100231

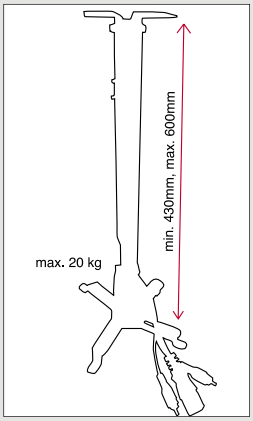

DMT PLB-1

NEW PRODUCT

LENGTH:
Wall Bracket for Plasma 75Kg

ORDERCODE 100210



DMT PLB-2

NEW PRODUCT

LENGTH:
Adj. Wall Bracket for Plasma

ORDERCODE 100211



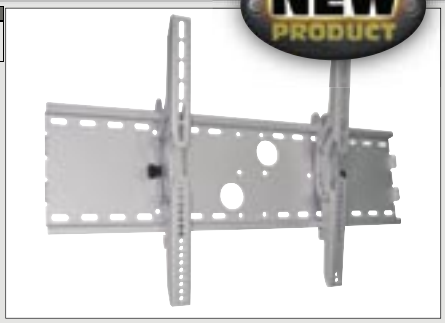

DMT TVB-301

NEW PRODUCT

LENGTH:
Bracket for 14" TV

ORDERCODE 100220



DMT TVB-306

NEW PRODUCT

LENGTH:
Adjustable Bracket for 29" TV

ORDERCODE 100221



DMT PLS-1

NEW PRODUCT

LENGTH:
Foldable plasma stand with anti-theft function

ORDERCODE 100212

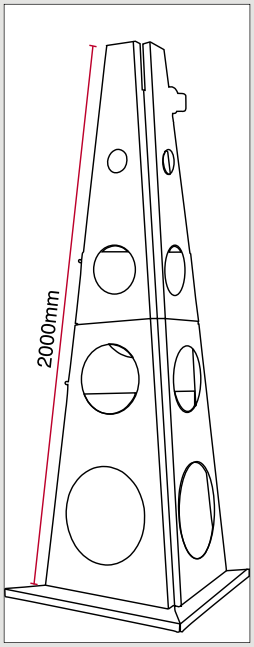

DMT FV10 Scart adapter

COLOUR:	
Video multi-transmission adapter in & out	ORDERCODE FV10

FVA01 - BNC M. > BNC F. 75 ohm

ORDERCODE FVA01

FVA02 - BNC M. > BNC M. 75 ohm

ORDERCODE FVA02

FVA03 - BNC M. > RCA F. 75 ohm

ORDERCODE FVA03

FVA04 - BNC F. > BNC F. 75 ohm

ORDERCODE FVA04

FVA10 - VGA/F > DVI/M

ORDERCODE FVA10

FVA11 - DVI/F > HDMI/M

ORDERCODE FVA11

FVA12 - DVI/M > HDMI/F

ORDERCODE FVA12

FVA05 - BNC F. > BNC F.

ORDERCODE FVA05

NEW PRODUCT

DMT FV01 - Ø6mm. BNC > BNC

LENGTH:	
1,5m.	ORDERCODE FV01150
3m.	ORDERCODE FV013
6m.	ORDERCODE FV016

LENGTH:	
10m.	ORDERCODE FV0110
15m.	ORDERCODE FV0115

DMT FV02 - Ø6mm. 3 BNC > 3 BNC

LENGTH:	
3m.	ORDERCODE FV023
6m.	ORDERCODE FV026

DMT FV05 - Ø6mm. 5 BNC > 5 BNC

LENGTH:	
1,5m.	ORDERCODE FV05150
3m.	ORDERCODE FV053

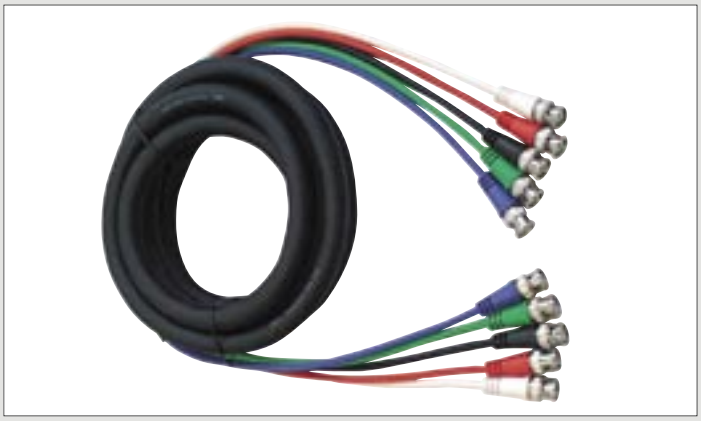

DMT FV34 - DVI > DVI

LENGTH:	
3m.	ORDERCODE FV343
6m.	ORDERCODE FL346
10m.	ORDERCODE FV3410

LENGTH:	
15m.	ORDERCODE FV3415
25m.	ORDERCODE FV3425

DMT FV40 - HDMI > HDMI

LENGTH:	
1,5m.	ORDERCODE FV40150
3m.	ORDERCODE FV403
6m.	ORDERCODE FV406

LENGTH:	
10m.	ORDERCODE FV4010
15m.	ORDERCODE FV4015

DMT FV03 - Ø6mm. RCA Male > RCA Male

LENGTH:	
1,5m.	ORDERCODE FV03150
3m.	ORDERCODE FV033
6m.	ORDERCODE FV036

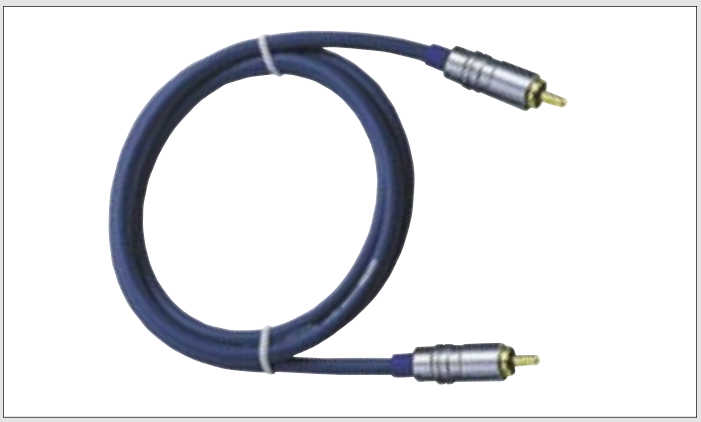

DMT FV04 - Ø6mm. 3 RCA Male > 3 RCA Male

LENGTH:	ORDERCODE
1,5m.	FV04150
3m.	FV043

DMT FOP01 - Toslink > Toslink

LENGTH:	ORDERCODE
0,75m.	FOP0175
1,5m	FOP01150
3m.	FOP013

LENGTH:	ORDERCODE
6m.	FOP016

optical cable incl. 2 miniplug adapters

DMT FOP02 - Miniplug > Miniplug

LENGTH:	ORDERCODE
0,75m.	FOP0275
1,5m.	FOP02150
3m.	FOP023

LENGTH:	ORDERCODE
6m.	FOP026

optical cable incl. 2 Toslink adapters

DMT FV33 - VGA > VGA

LENGTH:	ORDERCODE
3m.	FV333
6M.	FV336
10m.	FV3310

LENGTH:	ORDERCODE
15m.	FV3315
20m.	FV3320

DMT FV06 - Scart > 3 RCA Male

LENGTH:	ORDERCODE
1,5m.	FV06150

DMT FV08 - Scart > 2 RCA Male and 1 RCA Female

LENGTH:	ORDERCODE
1,5m.	FV08150

DMT FV07 - Scart > 6 RCA Male

LENGTH:	ORDERCODE
1,5m.	FV07150

DMT FV09 - Scart > Scart

LENGTH:	ORDERCODE
1,5m.	FV09150

DMT FV21- S-VHS > S-VHS

LENGTH:	ORDERCODE
3m.	FV213

DMT FV12 - Scart > 2 RCA Male and 1 S-VHS Male

LENGTH:	ORDERCODE
1,5m.	FV12150

DMT FV30 VGA to 3 BNC/M

NEW PRODUCT

LENGTH:	
1,5m.	ORDERCODE FV30150
3m.	ORDERCODE FV303

DMT FV31 VGA to 5 BNC/M

NEW PRODUCT

LENGTH:	
1,5m.	ORDERCODE FV31150
3m.	ORDERCODE FV313

DMT FV32 - DVI > 5 BNC/M

NEW PRODUCT

LENGTH:	
1,5m.	ORDERCODE FV32150
3m.	ORDERCODE FV323

DMT FV22 - Super VHS > 2 BNC/M

NEW PRODUCT

LENGTH:	
1,5M.	ORDERCODE FV22150
3m.	ORDERCODE FV223

DMT FV23 - IE1394 > IE1394

NEW PRODUCT

LENGTH:	
1,5m.	ORDERCODE FV23150
3m.	ORDERCODE FV233

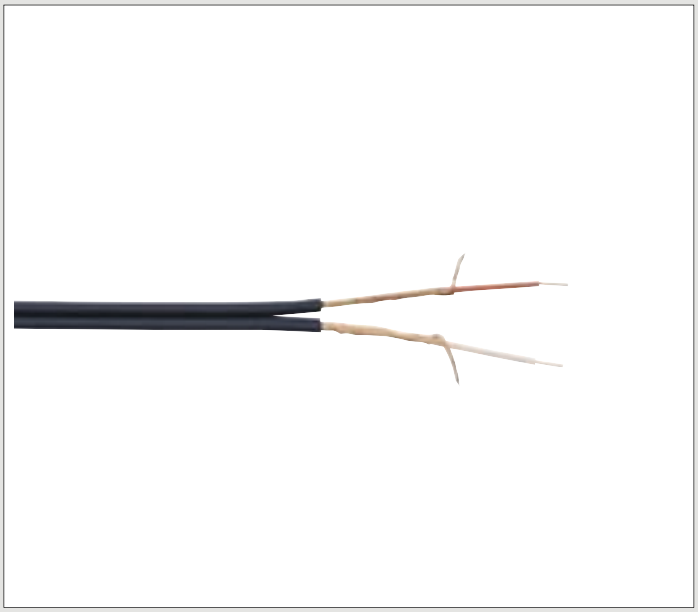

DMT AV-36

Audio/Video Cable A-symmetric 75 Ohm 100m. on spool

Technical Information

ORDERCODE **D9401**

• Conductor drains Ø mm:	OFC 20x0,12
• Conductor insulation:	PE red + transparent
• Conductor insulation Ø in mm:	1,3
• Filler material:	-
• 1st shield:	OFC twisted 32x0,12
• 2nd shield:	-
• Outer isolation:	PVC dark blue
• Outer isolation Ø in mm:	2x3
Conductor resistance:	80 Ω/Km
Shield resistance:	50 Ω/Km
Capacity Inner conductor:	-
Capacity Inner cond Shield / Inner cond:	160 pF/m
Working temperature min / max:	-20~60 °C
Working Voltage overflash:	30V
Non Impedance:	35 Ω
Attenuation:	
10MHz: 0,02480	
90MHz: 0,28000	
100MHz: 0,28530	
220MHz: 0,55350	
470MHz: 1,33130	
770MHz: 2,21180	
1000Mhz: 3,0271	

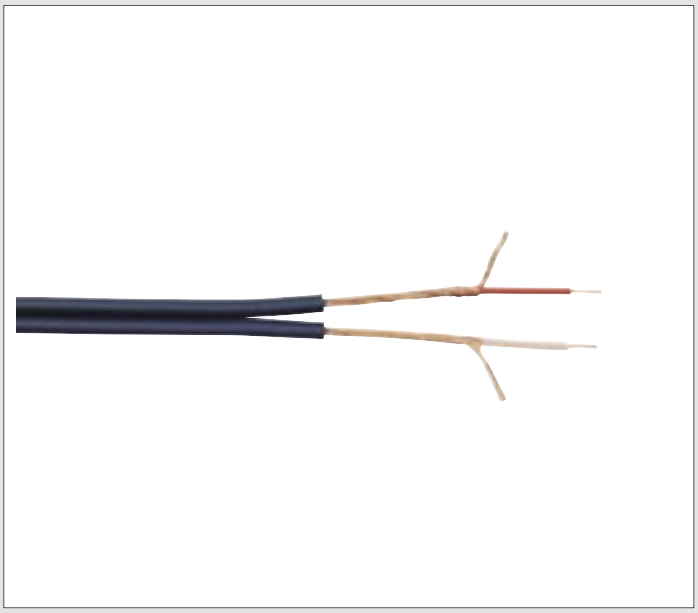

DMT AV-48

Audio/Video Cable A-symmetric 75 Ohm 100m. on spool

Technical Information

ORDERCODE **D9402**

• Conductor drains Ø mm:	OFC 20x0,12
• Conductor insulation:	PE red + transparent
• Conductor insulation Ø in mm:	1,3
• Filler material:	-
• 1st shield:	OFC twisted 32x0,12
• 2nd shield:	-
• Outer isolation:	PVC dark blue
• Outer isolation Ø in mm:	2x4
Conductor resistance:	80 Ω/Km
Shield resistance:	50 Ω/Km
Capacity Inner conductor:	-
Capacity Inner cond Shield / Inner cond:	160 pF/m
Working temperature min / max:	-20~60 °C
Working Voltage overflash:	30V
Non Impedance:	35 Ω
Attenuation:	
10MHz: 0,02480	
90MHz: 0,28000	
100MHz: 0,28530	
220MHz: 0,55350	
470MHz: 1,33130	
770MHz: 2,21180	
1000Mhz: 3,0271	

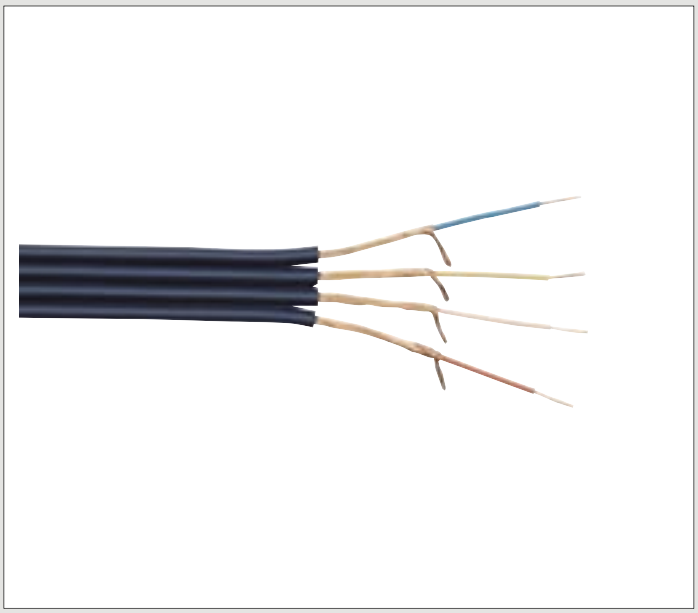

DMT AV-84

4-way Audio/Video Cable A-symmetric 75 Ohm 100m. on spool

Technical Information

ORDERCODE **D9403**

• Conductor drains Ø mm:	OFC 20x0,12
• Conductor insulation:	PE red+transparent+yellow+blue
• Conductor insulation Ø in mm:	1,3
• Filler material:	-
• 1st shield:	OFC twisted 32x0,12
• 2nd shield:	-
• Outer isolation:	PVC dark blue
• Outer isolation Ø in mm:	4x4
Conductor resistance:	80 Ω/Km
Shield resistance:	50 Ω/Km
Capacity Inner conductor:	-
Capacity Inner cond Shield / Inner cond:	160 pF/m
Working temperature min / max:	-20~60 °C
Working Voltage overflash:	30V
Non Impedance:	35 Ω
Attenuation:	
10MHz: 0,02480	
90MHz: 0,28000	
100MHz: 0,28530	
220MHz: 0,55350	
470MHz: 1,33130	
770MHz: 2,21180	
1000Mhz: 3,0271	

DMT AV-14

Audio/Video Cable 75 Ohm
100m. on spool

Technical Information

ORDERCODE **D9461**

• Conductor drains Ø mm:	0,4
• Conductor insulation:	PE
• Conductor insulation Ø in mm:	2,6
• Conductor resistance Ω/m:	138 Ω/Km
• Outer insulation:	PVC 4,2 Ø in mm
• Working temperature min / max:	-20~50 °C
• Voltage overflash:	30V
• Nominal impedance:	75 Ω

Attenuation:
10MHz: 0,02270
90MHz: 0,18650
100MHz: 0,19060
220MHz: 0,30640
470MHz: 0,76580
770MHz: 0,96420
1000Mhz: 1,6122

DMT AV-80

Double Shielded Video Cable 75 Ohm
100 m. on spool

Technical Information

ORDERCODE **D9463W**
ORDERCODE **D9463B**

• Conductor drains Ø mm:	0,58
• Conductor insulation:	PE
• Conductor insulation Ø in mm:	3,71
• Conductor resistance Ω/m:	65 Ω/Km
• Outer insulation:	PVC 6,2 Ø in mm
• Working temperature min / max:	-20~50 °C
• Voltage overflash:	30V
• Nominal impedance:	75 Ω

Attenuation:
10MHz: 0,01020
90MHz: 0,07210
100MHz: 0,06840
220MHz: 0,11920
470MHz: 0,20150
770MHz: 0,28750
1000Mhz: 0,35850

DMT AV-100

Super-Flex Shielded Video Cable 75 Ohm
100m. on spool

Technical Information

ORDERCODE **D9462**

• Conductor drains Ø mm:	0,58
• Conductor insulation:	PE
• Conductor insulation Ø in mm:	3,71
• Conductor resistance Ω/m:	65 Ω/Km
• Outer insulation:	PVC 4,2 Ø in mm
• Working temperature min / max:	-20~50 °C
• Voltage overflash:	30V
• Nominal impedance:	75 Ω

Attenuation:
10MHz: 0,02270
90MHz: 0,18650
100MHz: 0,19060
220MHz: 0,30640
470MHz: 0,76580
770MHz: 0,96420
1000Mhz: 1,6122

DMT AV-500

5 Way Video Cable 75 Ohm
price per meter

Technical Information

ORDERCODE **D9466**

• Conductor drains Ø mm:	0,58
• Conductor insulation:	PE
• Conductor insulation Ø in mm:	3,71
• Conductor resistance Ω/m:	65 Ω/Km
• Outer insulation:	PVC 4,2 Ø in mm
• Working temperature min / max:	-20~50 °C
• Voltage overflash:	30V
• Nominal impedance:	75 Ω